

Anti vibration
mounts

AKUSTIK SUPER T60 + SYLOMER®




These acoustic hangers have been conceived for suspension from suspended ceilings, vibrating pipelines and machinery that has to be suspended. The excellent properties of the Sylomer® microcellular polyurethane achieve elevated isolation values as opposed to other mounts using rubber or cork, or a combination of both.

TECHNICAL CHARACTERISTICS





These antivibration mounts are manufactured in two special mixes of Sylomer® to adapt better to the load of each application. A great variety of fixing metal armors and elements facilitate installation and adapt better to each type of job. Their rugged metal parts withstand can tensile stresses from 650 kg to 1000 kg. They are supplied with an anticorrosive treatment that can withstand the toughest environments.

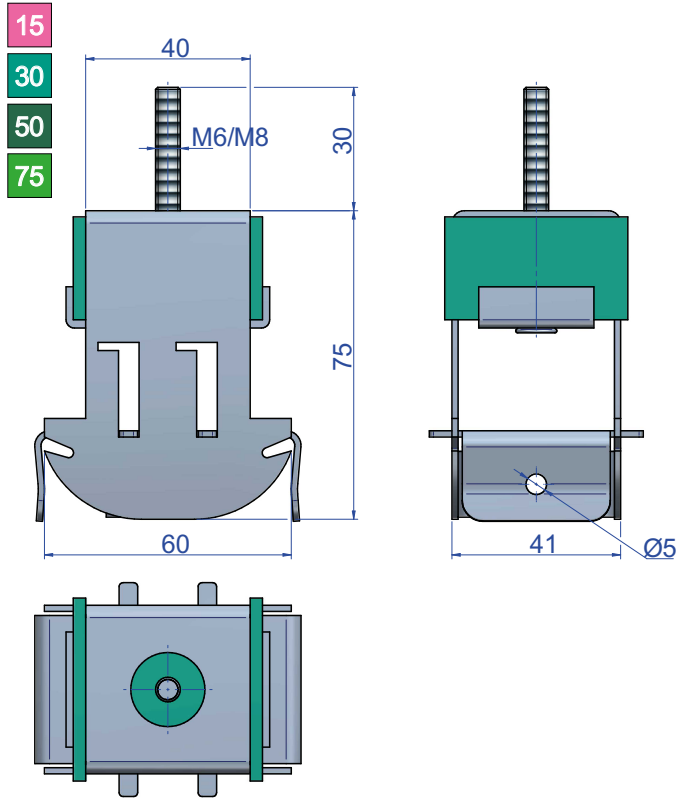


DRAWINGS







DIMENSIONS

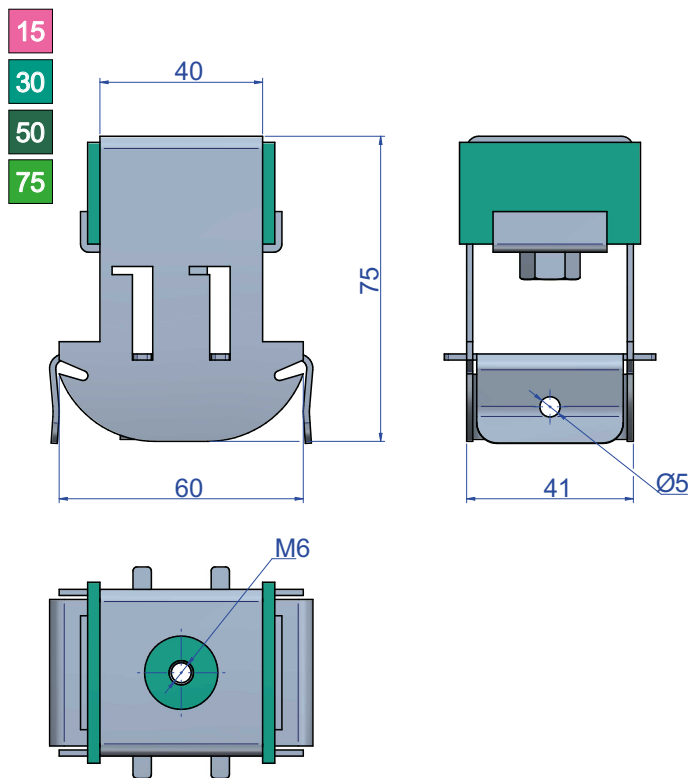	Type	SUMMARY	LOAD kg MAX	M	Weight (kg)	Code
	Akustik Super T-60 + Sylomer®15 type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	15	M6	0,133	23195
				M8	0,133	23226
	Akustik Super T60 + Sylomer®30 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	30	M6	0,189	23831
				M8	0,189	23228
	Akustik Super T60 + Sylomer®50 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	50	M6	0,189	23590
				M8	0,189	23230
	Akustik Super T60 + Sylomer®75 Type A	Metal armor of the Akustik Super secured to the ceiling by an screw.	75	M6	0,198	23851
				M8	0,198	23234

DRAWINGS







DIMENSIONS

	Type	SUMMARY	LOAD kg MAX	M	Weight (kg)	Code
	Akustik Super T-60 + Sylomer®15 tipo B	Metal armor of the Akustik Super secured to the ceiling by an6 screw.	15	M6	0,133	23196
				M8	0,133	23227
	Akustik Super T60 + Sylomer®30 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	30	M6	0,184	23832
				M8	0,184	23229
	Akustik Super T60 + Sylomer®50 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	50	M6	0,184	23591
				M8	0,184	23233
	Akustik Super T60 + Sylomer®75 Type B	Metal armor of the Akustik Super secured to the ceiling by an screw.	75	M6	0,194	23852
				M8	0,194	23853

Elastical properties

LOAD DEFLECTION GRAPHS

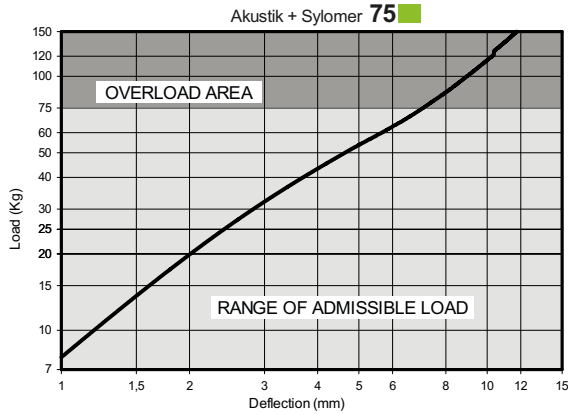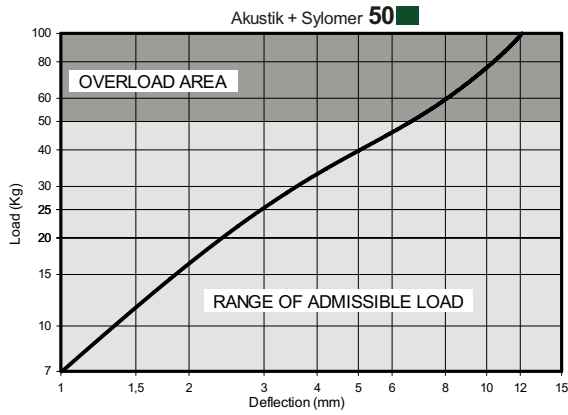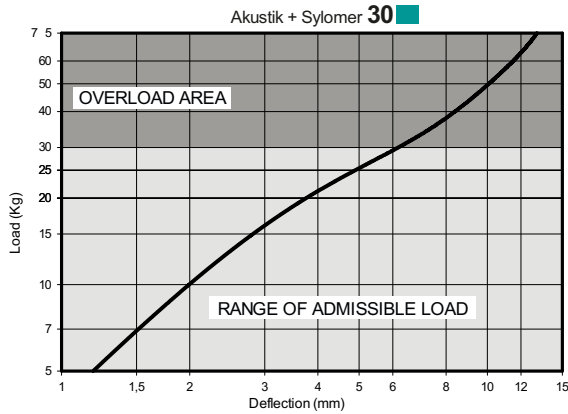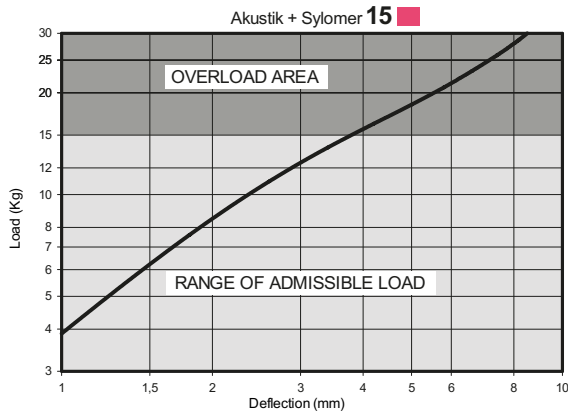

NATURAL FREQUENCY GRAPHS

