



FDA COMPLIANT AODD PUMPS

In stock and ready for immediate delivery



F-Series

Clamp-Band construction for applications requiring frequent cleaning

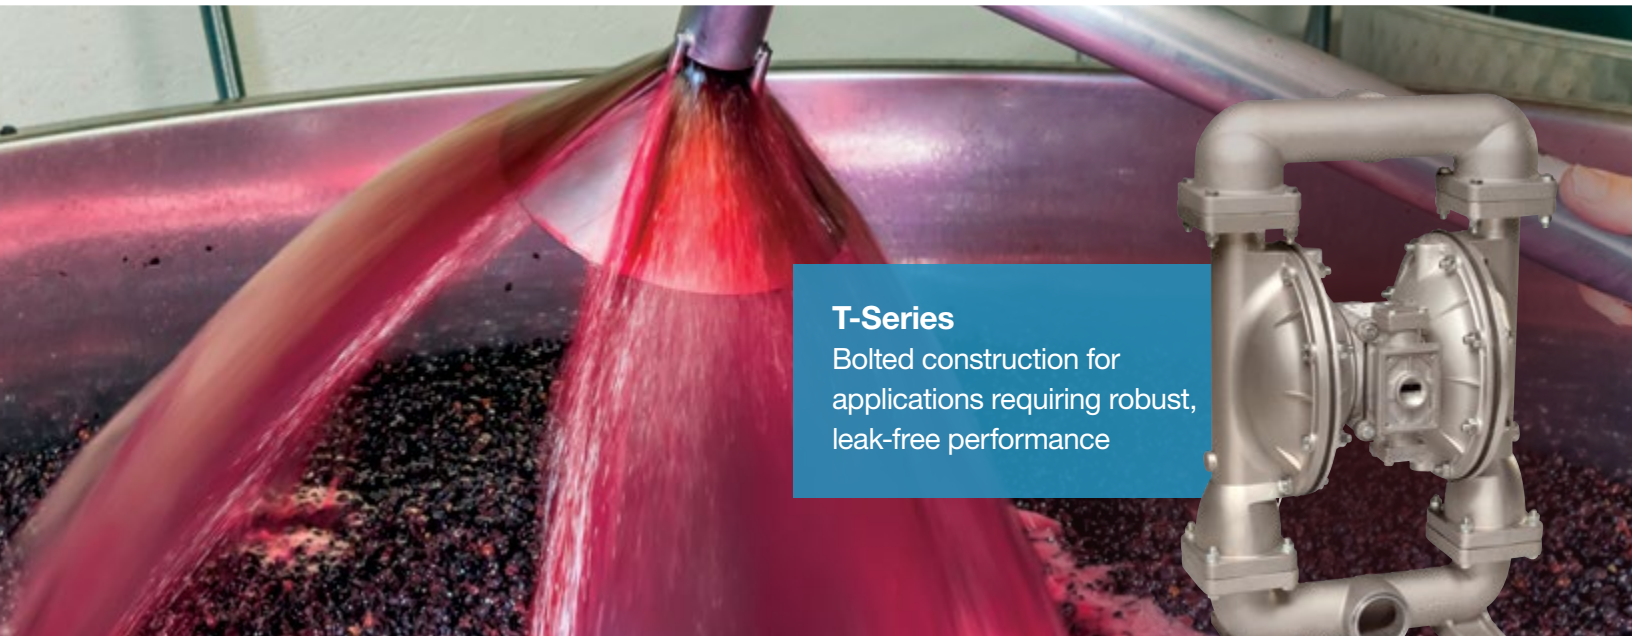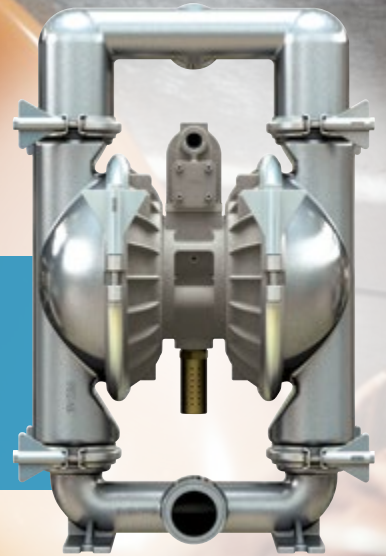

T-Series

Bolted construction for applications requiring robust, leak-free performance





APPLICATIONS

Product Transfer / Tank Over, Filling Lines, Blending and Mixing, and Ingredient Injection



EMERGING HEALTH & SAFETY MARKETS

- CBD Oil Production
- Sanitizers and Disinfectants
- Latex Gloves



DAIRY

- Yogurt
- Cottage Cheese
- Milk
- Butter
- Eggs
- Coffee Cream
- Ice Cream



FOOD & BEVERAGE

- Salsa
- Chili
- Soy Sauce
- Beer & Wine
- Juice Concentrates
- Corn Oils/Syrups
- Edible Oils
- Chocolate
- Salad Dressing
- Mayonnaise
- Condiments
- Tomato Sauce



PERSONAL CARE

- Hair Gel
- Shampoo
- Soap
- Perfumes
- Creams/Lotions
- Cosmetics
- Antiseptics
- Hair dye



PHARMACEUTICAL

- Chemicals
- Alcohol
- Deionized Water
- Acids



MEAT & POULTRY PROCESSING

- Animal blood
- Heparin
- Vaccines

SANITARY & Food Pumps

Technical Specifications

Offering an extensive range of products engineered to perform in your most demanding applications















F-Series



		F-Series			
		F05	F10	F15	F20
Typical Diaphragm Pump HYGIENIC Applications	MODEL	F05	F10	F15	F20
	Port Size (Internal)	1/2" (12.7 mm)	1" (25.4 mm)	1 1/2" (38 mm)	2" (50.8 mm)
	Maximum Flow Rate (GPM / LPM)	0-12 gpm (0-45.4 lpm)	0-49 gpm (0-185.5 lpm)	0-71 gpm (0-268 lpm)	0-185 gpm (0-700 lpm)
	Check Valve Type	Ball	Ball	Ball	Ball
	Pump Construction	Bolted	Bolted	Clamped	Clamped
	Solids Handling -Up to-	1/16"	1/8"	3/16"	1/4"
	Wetted Materials	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
	Air Section Materials	Polypropylene Nickel Plated Aluminum	Nickel Plated Aluminum Polypropylene	Nickel Plated Aluminum	Nickel Plated Aluminum Stainless Steel
	Surface Treatment	Electropolished Internally & Externally	Electropolished Internally & Externally	Electropolished Internally & Externally	Electropolished Internally & Externally
	Wetted Casting Surface Finish, Ra	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)
	Diaphragm Material	PTFE One-Piece* Hytrel Santoprene®	PTFE One-Piece* Hytrel Santoprene®	PTFE w/ Backer Hytrel Santoprene®	PTFE w/ Backer PTFE One-Piece* Hytrel Santoprene®
	Connection Size / Type	1 1/2" Sanitary Clamp	1 1/2" Sanitary Clamp	2" Sanitary Clamp	2 1/2" Sanitary Clamp
	Cleaning / Sanitizing Methods	Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)
Certifications	FDA COMPLIANT	FDA COMPLIANT	FDA COMPLIANT	FDA COMPLIANT	

Note: See service manual for complete specifications.
Santoprene® is a registered trademark of Exxon Mobil Corp
*One Piece PTFE NOT EC 1935 Certified

	T-Series					
						
F30	T1F	T15	T20	T30	TSA2	
3" (76.2 mm)	1" (25.4 mm)	1 1/2" (38 mm)	2" (50.8 mm)	3" (76.2 mm)	2" (50.8 mm)	
0-234 gpm (0-886 lpm)	0-45 gpm (0-170 lpm)	0-106 gpm (0-401 lpm)	0-200 gpm (0-758 lpm)	0-285 gpm (0-1,079 lpm)	0-208 gpm (0-787 lpm)	
Ball	Ball	Ball	Ball	Ball	Flap	
Clamped	Bolted	Bolted	Bolted	Bolted	Bolted	
3/8"	1/4"	1/4"	1/4"	3/8"	2"	
316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	
Nickel Plated Aluminum Stainless Steel	Epoxy Coated Aluminum	Epoxy Coated Aluminum Stainless Steel	Epoxy Coated Aluminum Stainless Steel	Epoxy Coated Aluminum Stainless Steel	Epoxy Coated Aluminum	
Electropolished Internally & Externally	As Cast	As Cast	As Cast	As Cast	As Cast	
Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	Ra 125 μ-in (3.175 μ-m)	
PTFE w/ Backer PTFE One-Piece* Hytrell Santoprene®	PTFE w/ Backer PTFE One-Piece* Nitrile Santoprene®	PTFE w/ Backer PTFE One-Piece* Santoprene®	PTFE w/ Backer PTFE One-Piece* Nitrile Santoprene®	PTFE w/ Backer Nitrile Santoprene®	Nitrile	
3" Sanitary Clamp	1 1/2" Sanitary Clamp	2" Sanitary Clamp	2 1/2" Sanitary Clamp	3" Sanitary Clamp	2 1/2" Sanitary Clamp	
Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)	Clean Out of Place (COP)	
						

SANDPIPER Synthesis One-Piece Diaphragms

A premium one-piece diaphragm that creates optimum conditions for high performance pumping and reliability. Expect longer service life and reduced maintenance costs with this premium diaphragm.

Available on most models.

- **Temperature Range** 14°F to 176°F (-10°C to 80°C)
- **Torque-Free Installation** Simply hand turned into position
- **No Center Hole** for superior leak free operation and installation
- **No Outer Diaphragm Plate**
Abrasion due to trapped fluids
- **Oversized Integrated Plate** supports nearly 50% of the diaphragm through the entire dynamic motion
- **Start-Up Pressure** of less than 10 PSI on SANDPIPER Synthesis Diaphragm vs. 25 PSI or more on competitive diaphragms
- **One-Piece Composite Design** with 100% PTFE on the wetted side bonded to a Nitrile Rubber Backer (NRB) with an integrated diaphragm plate



SANDPIPER Standard Duty Non-Metallic Pumps

Chemically resistant, high-performance, leak-free pumps for transfer and mixing of cleaning chemicals.

- ¼" through 3" for flow capacities as high as 280 GPM (1060 LPM)
- All bolted construction for robust, leak-free performance
- Polypropylene or PVDF wetted materials for compatibility with CIP/COP chemicals (conductive materials also available upon request)

SANDPIPER®

Warren Rupp, Inc.
A Unit of IDEX Corporation
800 North Main Street
Mansfield, OH 44902 USA

Phone: 419.524.8388
Fax: 419.522.7867
SANDPIPERPUMP.COM

©Copyright 2020 Warren Rupp, Inc. All Rights Reserved.

Visit www.sandpiperpump.com and click on "Find a distributor" to contact your local distributor to place your order